



SECTION A

GENERAL NOTES (PAVERS)

1. FURNISH DETECTABLE WARNING PAVER UNITS MEETING ALL REQUIREMENTS OF ASTM C-936, C-33. LAY IN A TWO BY TWO UNIT BASKET WEAVE PATTERN OR AS DIRECTED.
2. LAY FULL-SIZE UNITS FIRST FOLLOWED BY CLOSURE UNITS CONSISTING OF AT LEAST 25 PERCENT OF A FULL UNIT. CUT DETECTABLE WARNING PAVER UNITS USING A POWER SAW.

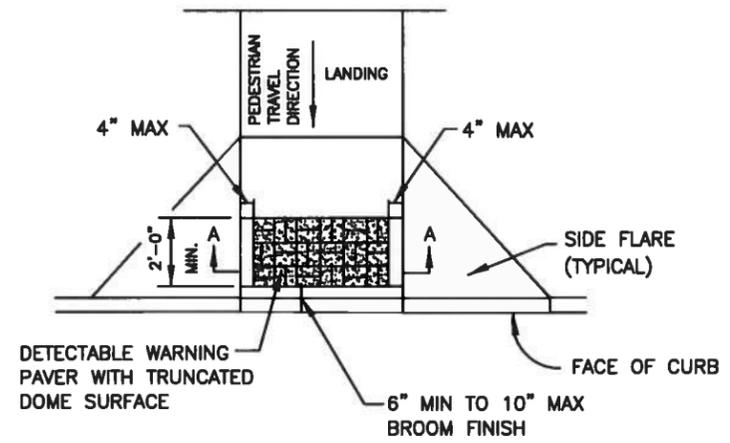

DETECTABLE WARNING PAVER (OPTION)

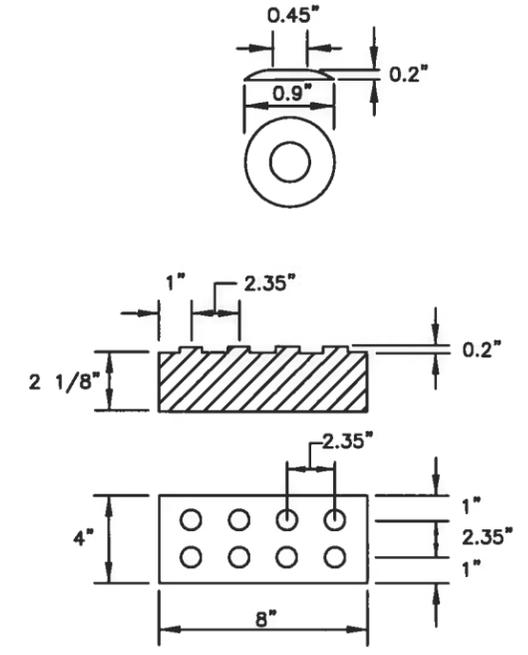

DETECTABLE WARNING PAVER

CITY OF HOUSTON DEPARTMENT OF PUBLIC WORKS AND ENGINEERING	
DETECTABLE WARNING PAVER (OPTION)	
(NOT TO SCALE)	
APPROVED BY:  CITY ENGINEER	APPROVED BY:  DIRECTOR OF PUBLIC WORKS AND ENGINEERING
EFF DATE: JULY-01-2012	DWG NO: 02775-07